

## UPC3000 Specification

Issue 2, March 2017

### Synopsys

The UPC3000 represents a new concept in Uplink Power Control.

Satellite uplink stations, mainly for radio and TV broadcasting, use uplink power control to compensate for sporadic but sometimes severe atmospheric losses due to rain, ice and/or snow in the satellite path. Several systems have been used over the years with variable, mixed success. The ideal Uplink Power Control System should be fast, reliable, simple and avoid unwanted saturation of transmitting earth station HPAs and satellite on board equipment.

Novella SatComs pioneered a novel simple approach for the uplink power control task using the real time accurate measurement of a satellite beacon level to control a variable gain amplifier placed in the uplink signal path. The resulting combination of the highly successful UPC300 and the long established B355/B356 range of beacon tracking receivers is based on the principle that each 1dB of loss on the downlink will be compensated by an additional 1dB gain on the uplink, and it became a best selling system due to great simplicity, reliability and ease of commissioning and installation. Provision was made for the user to limit the amount of adjustment in order to prevent HPA saturation.

The UPC3000 combines in a single 1U chassis Novella's best selling stand alone UPC300 uplink power controller and the high performance compact tracking receiver. This new product provides a fast, simple, reliable, out of the box solution for uplink power control.

### Brief description

The UPC3000 contains 1 to 4 (defined at the time of order) variable gain amplifiers, to be inserted in the uplink signal path. They compensate the uplink power for changes in atmospheric path losses. The path loss is measured by the internal beacon receiver (engine is the same as in the B30 series of compact tracking receivers) whose DC output is conditioned to control the variable gain amplifiers.

The maximum level of compensation is adjustable in 2dB steps from 2 to 10dB. If beacon fade exceeds the preset value the amplifier gains are held to prevent overdriving of the HPA. A bypass switch allows the compensation to be removed, in this mode the gain of the unit is unitary, 0dB.

If the beacon signal is lost the UPC300 reverts to bypass mode.

Up to 4 variable gain amplifiers may be fitted internally. These may be rated at IF, 50 to 180 MHz, or L-band, 950 to 2,150 MHz, depending on earth station architecture.

The UPC3000 is usually fitted with an L-band tracking receiver, 940 to 1,750MHz or 940 to 2,150MHz.



## Outline specification

### 1. UPC section

Input range, uplink signal paths amplifiers:	50 to 180 MHz or 950 to 2150 MHz
Number of Inputs / Outputs:	1 to 4
Compensation Range:	Front panel switchable from 2 to 10dB in 2dB steps
Compensation Ratio:	1dB drop of beacon level increases gain by 1dB
	Option: 1dB drop increases gain by 1.2dB, or other value
Input/Output Return Loss:	15dB typical
Output 1dB compression point:	> +5dBm.
Front panel controls and indicators:	Compensation range (2, 4, 6, 8 and 10dB) Bypass / Auto Alarm LED - Red Beacon too High - Orange Beacon too Low - Orange

### 2. Beacon receiver section


RF input:	940 to 2,150MHz or 940 to 1,750MHz
DC output:	±10V, 2db/V slope
	Note: Although this voltage is externally available, it is used internally and its settings must not be changed after initial setup.
Synthesiser:	10kHz step

### 3. General

Power input:	- IEC power connector, - 115V/230V ± 10% ac, - 50/60Hz ± 10%, 20VA max
Mechanical:	- 1U 19" standard chassis, 400mm
Interface, D-type 25-way female:	- Summary alarm - Beacon receiver DC output
Temperature:	- 0° to 50°C operating - -40° to 85°C storage
Humidity:	- 0 to 90% operating (non-condensing) - 0 to 95% storage
Serial interface, D-type 9-way female:	- RS232 or RS422/RS485 serial interface
	Option: - Ethernet interface, network serial port emulator, or SNMP and web browser interface.

For further information contact:

**Novella SatComs Limited**  
Kerry House, Kerry Garth  
Horsforth, Leeds, LS18 4TL, UK  
Tel: +44-113-258-0880  
www.novella.co.uk  
novella@novella.co.uk

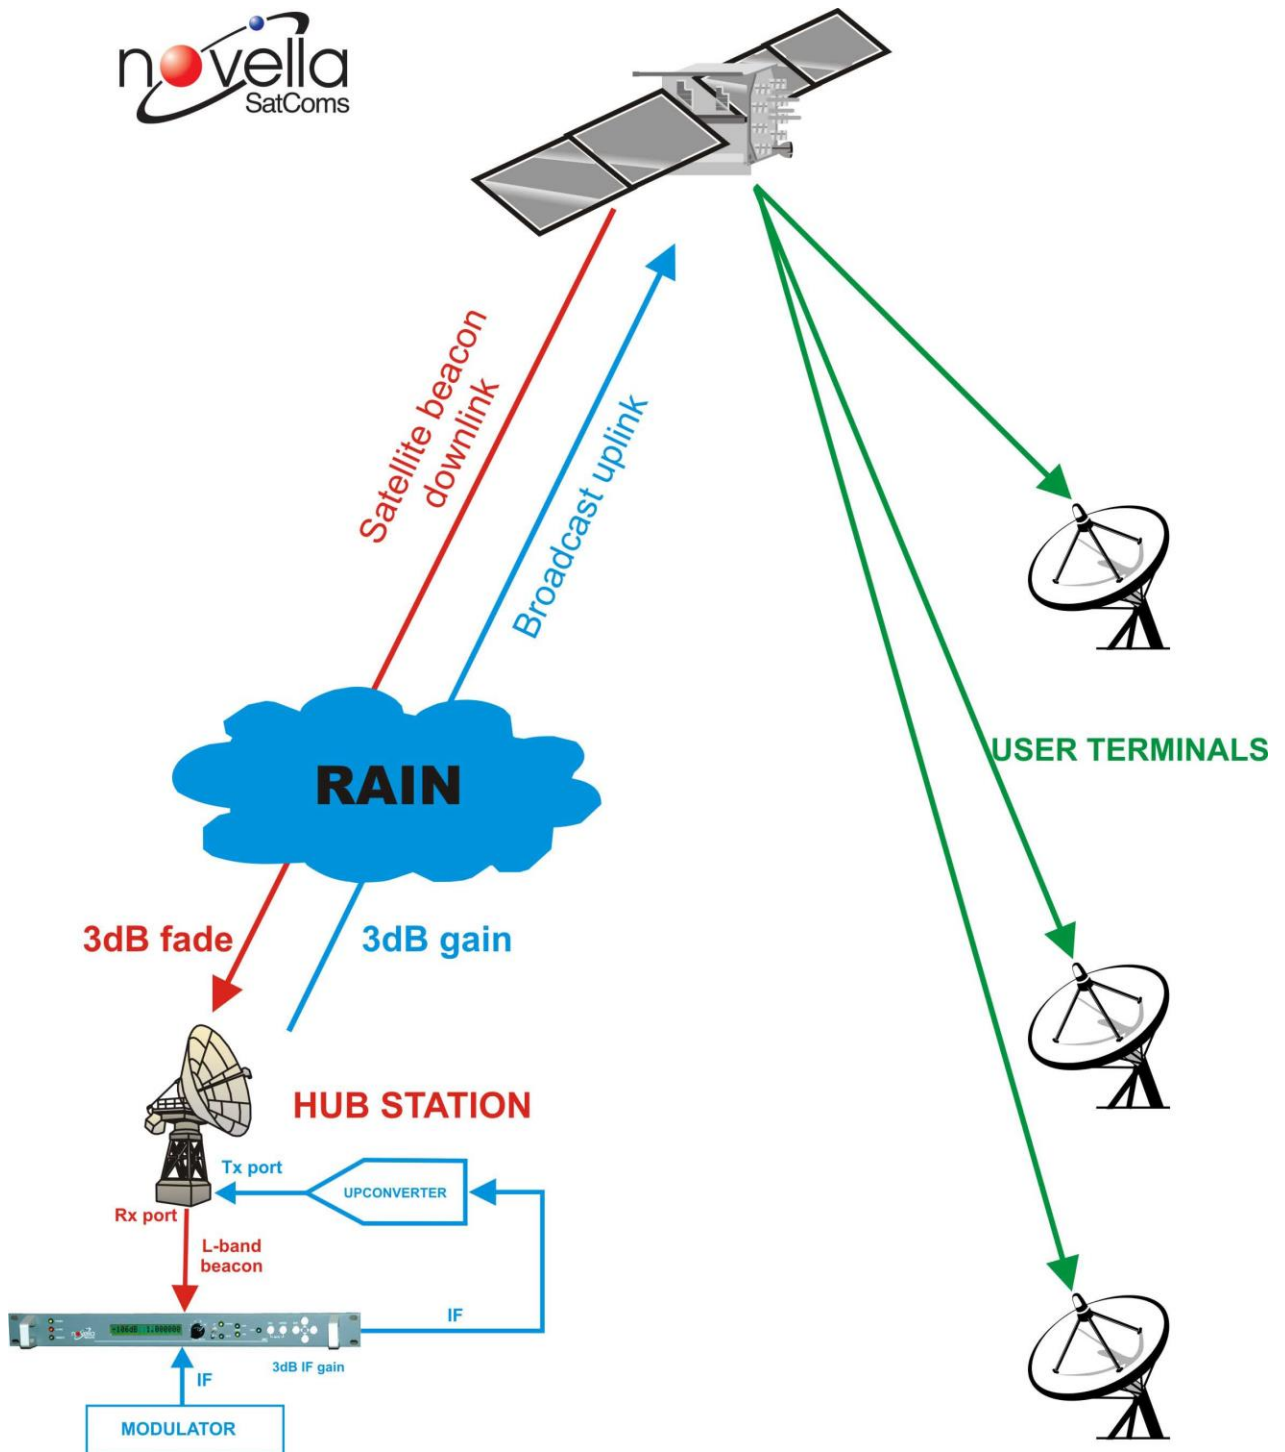

## UPC3000 UPLINK POWER CONTROLLER



**Novella SatComs Limited**  
Kerry House, Kerry Garth  
Horsforth, Leeds, LS18 4TL, UK  
Tel: +44-113-258-0880  
www.novella.co.uk  
novella@novella.co.uk